



VHF MIXER COMBINER NETWORK

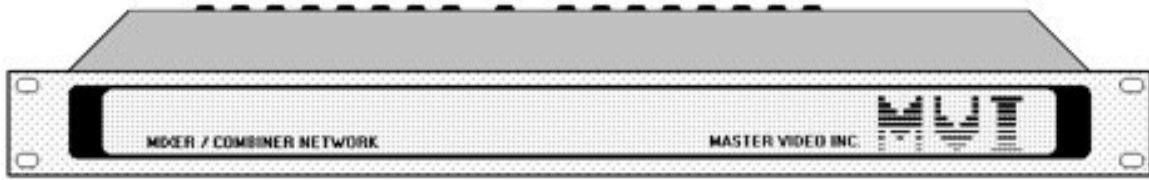

The MVI Mixer / Combiner Networks MIX-VHF and MIX-UHF are passive output combiners with 16 single channel input ports. They are used in headends to combine up to 16 television channels. Mixer / Combiners can be cascaded to provide more channels in larger systems. The unit features high isolation between ports. A -20dB test point permits testing and checking. This series is manufactured in NTSC, PAL and SECAM standards.

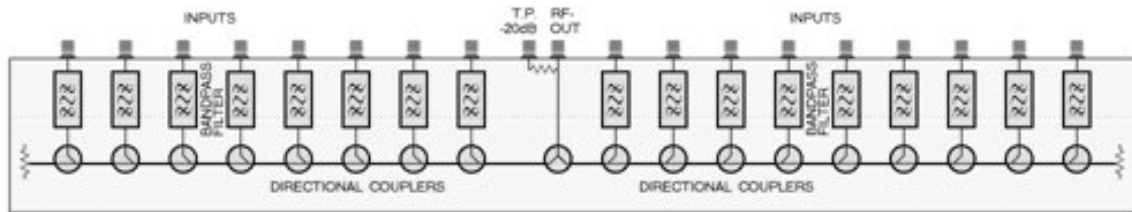

SPECIFICATIONS:

- MIX-VHF FREQUENCY RANGE: 40-300 MHz, custom built, specify channels
- MIX-UHF FREQUENCY RANGE: 300-800 MHz, custom built, specify channels
- TV-NORM: NTSC and all PAL and SECAM standards
- INSERTION LOSS: -18 dB
- ISOLATION: 30 dB adjacent, 45 dB nonadjacent
- IMPEDANCE: 75 Ohm
- TESTPOINT: -20 dB
- INPUT CHANNELS: max. 16, units can be cascaded
- CONNECTORS: F
- ENCLOSURE: 1.75" x 19" rackmount

[specs. subject to change]



MASTER VIDEO INC

1122 Castlefield Ave., TORONTO, ONT. M6B 1E9

TEL: (416) 785-6565 FAX: (416) 785-6566

WEBSITE: <http://www.mastervideo.ca>



CANADA TOLL FREE FAX: 1-800-267-9571

E-mail: sales@mastervideo.ca